



PolyWorks[®]

v12

PolyWorks | Inspector[™] Airfoil Gauge Module

The most comprehensive airfoil inspection solution on the market for a complete dimensional analysis of fan, compressor, and turbine blades

Complete solution for quality control

- Use the most powerful and robust camber line fitter in the industry (handles all standard cambered blades as well as blades with non-cambered thick sections and blades with one or two cutback ends)
- Process datasets produced by any 3D measurement principle (white and blue light digitizers, X-ray digitizers, lasers scanners, CMMs)
- Benefit from all the standard functionality of PolyWorks/Inspector (parametric, traceable, and updatable inspection projects, comprehensive set of part and cross-sectional alignment methods, cylindrical and conical sectioning and unfolding, statistical process control and trend analysis, and more)

Most flexible toolbox for reverse engineering and adaptive manufacturing

- Digitize a set of legacy or competitor blades, build an average blade model, and analyze the upper and lower tolerance envelopes of the multi-piece set
- Use airfoil gauges and extract key features and dimensions on a blade to create a model in your corporate CAD modeler
- Benefit from all the standard functionality of the optional PolyWorks/Modeler[™] package (NURBS surfacing, 2D sketching, NURBS curve creation and editing)



RP +X 2
Dist along X: -0.000


RL +Y 1
Dist along Y: -0.000

RP +X 1
Dist along X: 0.000

RP +X 3
Dist along X: -0.000

RP -Z
Dist along Z: 0.000

RL +Y 2
Dist along Y: -0.000

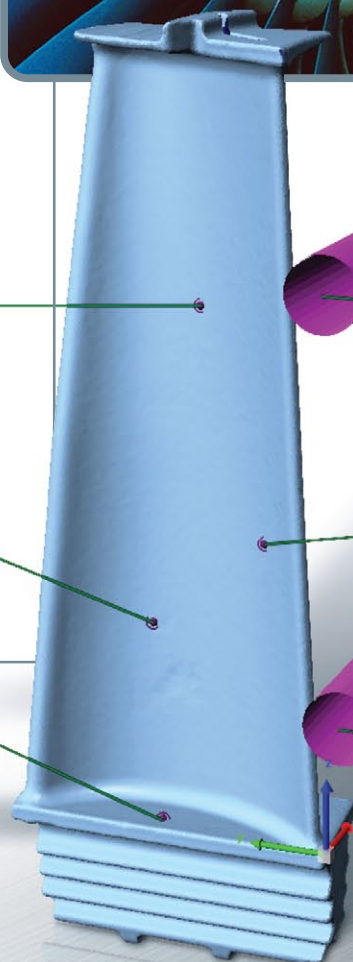



Technical Specifications

Standard Dimensional Measurements

- Leading and trailing edge radii
- Camber line length
- Maximum thickness
- Chord length
- Maximum width (aerodynamic and tangential)
- Twist and stagger angles
- Smallest enclosing circle
- Inlet and exit angles
- Unlimited number of thickness measurements along the camber line from leading edge or trailing edge points (10 by default)
- Area
- Distance between airfoils in a ring or blisk


Geometric Primitives

- Camber line
- Leading edge point
- Trailing edge point
- Center of gravity
- Maximum thickness point
- Smallest enclosing circle
- Tangent vector
- Leading edge tangent point
- Trailing edge tangent point

Data-to-CAD Point Deviations

- Leading edge point deviation
- Trailing edge point deviation
- Center of gravity deviation
- Maximum thickness point deviation
- Leading edge tangent point deviation
- Trailing edge tangent point deviation

PolyWorks airfoil gauges are fully customizable and can be reprogrammed to meet specific customer requests

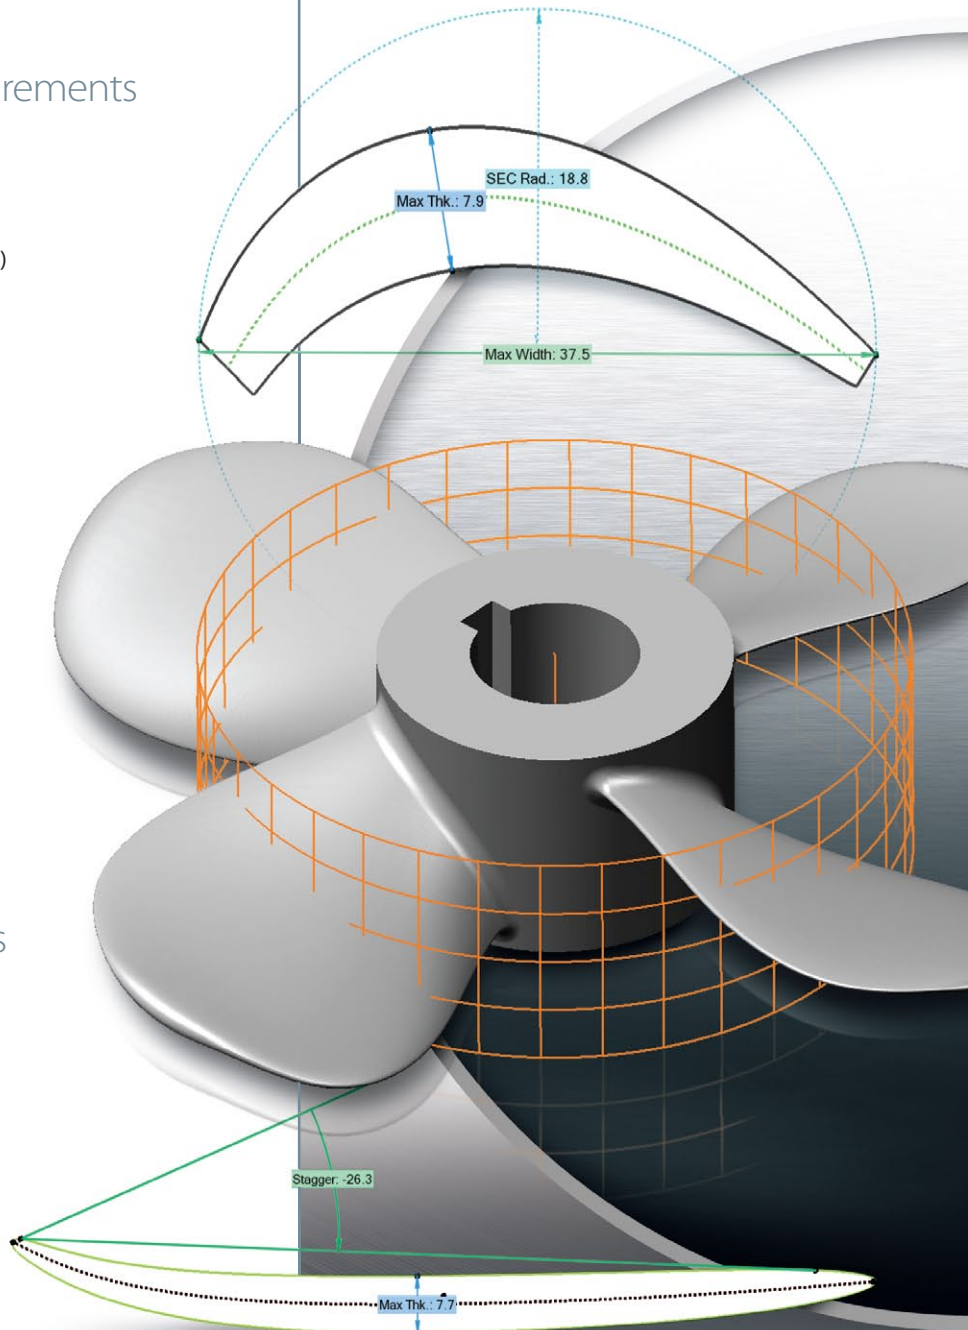

InnovMETRIC
Software

Your One-Stop 3D Metrology Partner

www.innovmetric.com

Corporate Headquarters | InnovMetric Software Inc. 2014, Cyrille-Duquet, Suite 310, Québec QC G1N 4N6 Canada
Phone: 418-688-2061 | **Toll free:** 1-888-688-2061 | **Fax:** 418-688-3001 | info@innovmetric.com

Québec Canada | **Detroit, MI, USA** | **Los Angeles, CA, USA** | **Dallas, TX, USA** | **Salisbury, NC, USA** | **Pune India** | **Shanghai China**
Paris France | **Lindau Germany** | **Kaluga Russia** | **Bangkok Thailand** | **São Paulo Brazil**
Duwe-3d AG, partner office in Europe

© 2011 InnovMetric Software Inc. All rights reserved. PolyWorks® is a registered trademark of InnovMetric Software Inc. InnovMetric, PolyWorks/Modeler, PolyWorks/Inspector, PolyWorks/Inspector Probing, PolyWorks/Talisman, IMAlign, IMMerge, IMEdit, IMCompress, IMInspect, IMSurvey, IMTexture, IMView, and "The Universal 3D Metrology Software Platform" are trademarks of InnovMetric Software Inc. SmartGD&T is a trademark of Multi Metrics Inc. All other trademarks are the property of their respective owners.

